

EM-W440 50HZ

WEICHAI Engine

EMEAN
POWER



Generator Specification

Service	PRP	ESP
Power (kva)	400	440
Power (kw)	320	352
Rated speed (r.p.m)	1500	
Rated Power factor	0.8 @lagging	

Performance

Engine Brand	WEICHAI
Engine model	WP13D385E200/350KW
Alternator	VG-314F/320KW
Breaker	CHNIT MCCB 3P
Control system	AMF digital panel
Fuel consum. @100% load	197.0 g/kW.h

CERTIFICATE:

EMEAN Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:
EN ISO 12100:2010,
EN ISO 8528-13:2016,
EN 60204-1:2006+A1:2009+AC:2010,
EN 55012:2007+A1:2009




CERTIFICATE:

EMEAN Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:
EN ISO 12100:2010,
EN ISO 8528-13:2016,
EN 60204-1:2006+A1:2009+AC:2010,
EN 55012:2007+A1:2009

Dimension

Type	Open	Silent
Length (L)	3400mm	3900mm
Width (W)	1300mm	1250mm
Height (H)	1950mm	2250mm
Net Weight	3600kg	4200kg

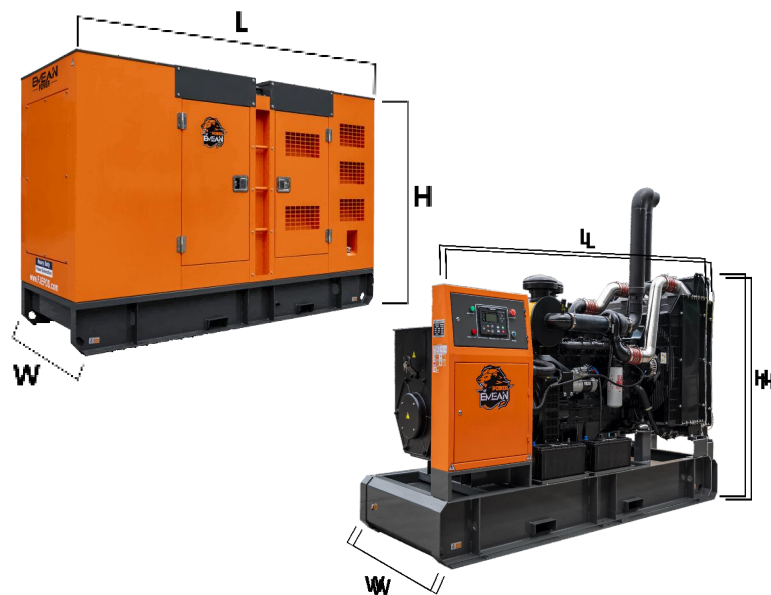

Standard Features:

- 1.power by Brand new water cooled diesel engine
- 2.Brushless alternators (Class H, with AVR)
- 3.Working condition: 0℃~+40℃ (Antifreeze system needed if below 0℃)
- 4.Base frame fuel tank for continue 8-10hrs running
- 5.Digital control panel with auto protection
- 6.MCCB air circuit breaker for over current shutdown
- 7.Industrial silencer for silent type generator sets
- 8.Humanized design, simple operation, easy maintenance
- 9.Ventilation parts are designed with modular principles
- 10.Soundproof canopy which lined with sound reducing foam
- 11.All metal canopy parts are painted by powder foam
- 12.Glass Panel window
- 13.Lockable doors on front and back side for easy maintenance
- 14.Easy maintenance and operation
- 15.Easy lifting and moving, there is forklift hooks and crane holes on chassis
- 16.External emergency stop button
- 17.Steel chassis and anti-vibration pads
- 18.Include diesel level sensor information to the


Warranty

We shall provide a warranty of 12 months or 1200 hours from B/L date (whichever comes first), covering all manufacturing defects. We replace damaged parts caused by manufacturing faults or defected parts/materials, but exclude the damageable parts due to customer's incorrect man-made operation. After expiration, we still provides technical and spare parts support with cost for maintenance.



WEICHAI WP13D385E200/350KW

Please download the detailed engine data sheet

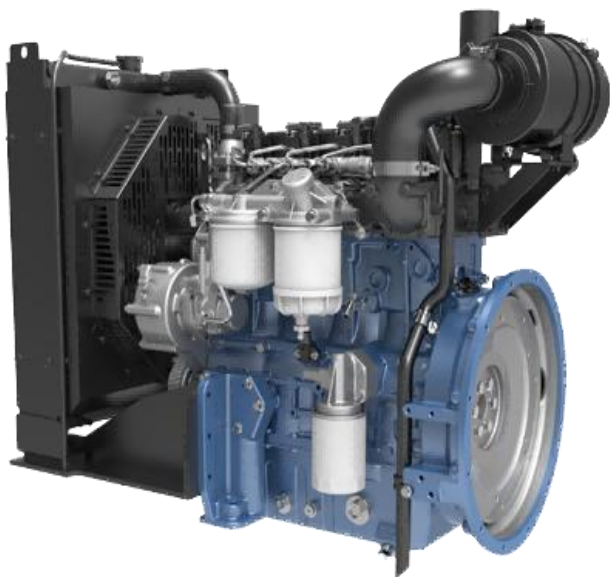

Alternator VG-314F/320KW

Please download the detailed alternator data sheet



Digital control panel

Please download the detailed controller manual



AUTOMATIC SHUTDOWN AND FAULT CONDITIONS

- Under/over speed; fail to start
- High engine temperature; fail to stop
- Low oil pressure; charge fail
- Under/over generator volts; over current
- Under/over generator frequency; emergency stop
- Under/over mains frequency
- Under/over mains voltage
- Low/high battery volts

CHNIT MCCB breaker 3P



Sealed 12/24V Dry battery



ATS



Remote Control



Charger



Jacket Heater



Oil Heater



Extra Fuel Tank



Parallel Cabinet



Trailer



Contact Information


Email: sale5@fjepos.com

Phone: +86 19890349907

WHATSAPP



WECHAT



VIBER

