

EM-W481 50HZ

WEICHAI Engine



Generator Specification

Service	PRP	ESP
Power (kva)	438	481
Power (kw)	350	385
Rated speed (r.p.m)	1500	
Rated Power factor	0.8 @lagging	

Performance

Engine Brand	WEICHAI
Engine model	WP13D440E310/392KW
Alternator	VG-314FM/360KW
Breaker	CHNIT MCCB 3P
Control system	AMF digital panel
Fuel consum. @100% load	197.5g/kw.h

CERTIFICATE:

EMEAN Power gensets are compliant with ISO 9001 and CE standard, which include the following directives: EN ISO 12100:2010, EN ISO 8528-13:2016, EN 60204-1:2006+A1:2009+AC:2010, EN 55012:2007+A1:2009




CERTIFICATE:

EMEAN Power gensets are compliant with ISO 9001 and CE standard, which include the following directives: EN ISO 12100:2010, EN ISO 8528-13:2016, EN 60204-1:2006+A1:2009+AC:2010, EN 55012:2007+A1:2009


Dimension

Type	Open	Silent
Length (L)	3510mm	4100mm
Width (W)	1300mm	1600mm
Height (H)	2000mm	2250mm
Net Weight	4350kg	5200kg

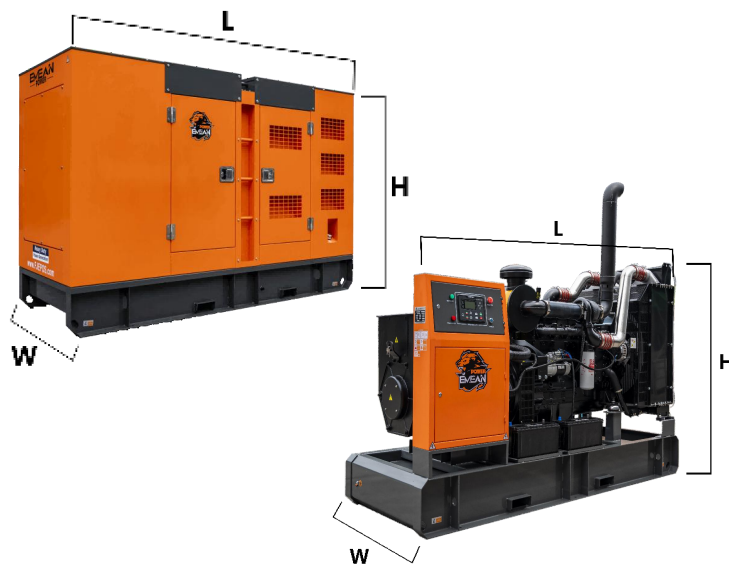

Standard Features:

- 1.power by Brand new water cooled diesel engine
- 2.Brushless alternators (Class H, with AVR)
- 3.Working condition: 0℃~+40℃ (Antifreeze system needed if below 0℃)
- 4.Base frame fuel tank for continue 8-10hrs running
- 5.Digital control panel with auto protection
- 6.MCCB air circuit breaker for over current shutdown
- 7.Industrial silencer for silent type generator sets
- 8.Humanized design, simple operation, easy maintenance
- 9.Ventilation parts are designed with modular principles
- 10.Soundproof canopy which lined with sound reducing foam
- 11.All metal canopy parts are painted by powder foam
- 12.Glass Panel window
- 13.Lockable doors on front and back side for easy maintenance
- 14.Easy maintenance and operation
- 15.Easy lifting and moving, there is forklift hooks and crane holes on chassis
- 16.External emergency stop button
- 17.Steel chassis and anti-vibration pads
- 18.Include diesel level sensor information to the controller

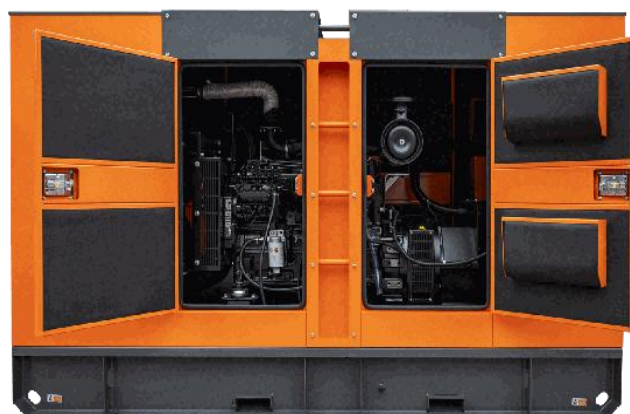


Warranty

We shall provide a warranty of 12 months or 1200 hours from B/L date (whichever comes first), covering all manufacturing defects. We replace damaged parts caused by manufacturing faults or defected parts/materials, but exclude the damageable parts due to customer's incorrect man-made operation. After expiration, we still provides technical and spare parts support with cost for maintenance.

Equip With

WEICHAI WP13D440E310/392KW

Please download the detailed engine data sheet

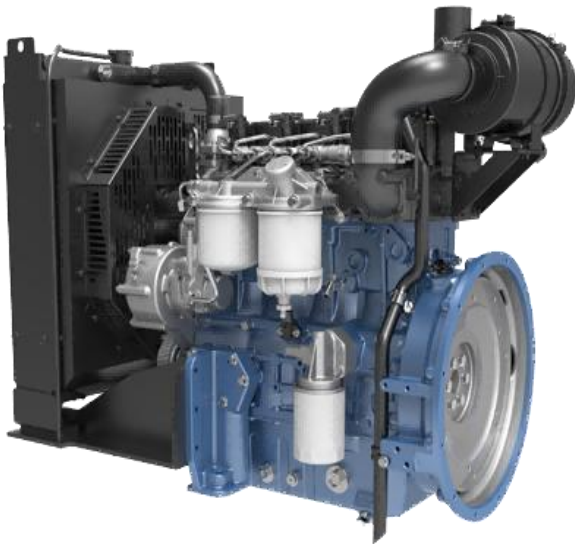

Alternator VG-314FM/360KW

Please download the detailed alternator data sheet



Digital control panel

Please download the detailed controller manual



AUTOMATIC SHUTDOWN AND FAULT CONDITIONS

- Under/over speed; fail to start
- High engine temperature; fail to stop
- Low oil pressure; charge fail
- Under/over generator volts; over current
- Under/over generator frequency; emergency stop
- Under/over mains frequency
- Under/over mains voltage
- Low/high battery volts

CHNIT MCCB breaker 3P



Sealed 12/24V Dry battery



Option

ATS



Remote Control



Charger



Jacket Heater



Oil Heater



Extra Fuel Tank



Parallel Cabinet



Trailer



Contact Information

Email: sale5@fjepos.com

Phone: +86 19890349907

WHATSAPP



WECHAT



VIBER

