# **EM-Y18**

# **YANGDONG Engine**







## **Generator Specification**

| Service              | PRP          | ESP |
|----------------------|--------------|-----|
| Power (kva)          | 16           | 18  |
| Power (kw)           | 13           | 14  |
| Rated speed ( r.p.m) | 1800         |     |
| Rated Power factor   | 0.8 @lagging |     |

#### **CERTIFICATE:**

EMEAN Power gensets are compliant **ISO 900** with ISO 9001 and CE standard. which include the following directives: EN ISO 12100:2010, EN ISO 8528-13:2016, EN 60204-1:2006+A1:2009+AC:2010, EN 55012:2007+A1:2009






| Performance             |                   |  |  |
|-------------------------|-------------------|--|--|
| Engine Brand            | YANGDONG          |  |  |
| Engine model            | YD480D/16KW       |  |  |
| Alternator              | VG-164C/13KW      |  |  |
| Breaker                 | CHNIT MCCB 3P     |  |  |
| Control system          | AMF digital panel |  |  |
| Fuel consum. @100% load | 5.02L/H           |  |  |

#### **POWER DEFINITION:**

PRP(Prime Power): Prime Power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO 8528-1.

ESP(Standby Power): The standby power rating is applicable for supplying emergency power in variable load applications in accordance with ISO 8528-1.Overload is not allowed

| Dimension  |        |        |
|------------|--------|--------|
| Туре       | Open   | Silent |
| Length (L) | 1520mm | 1750mm |
| Width (W)  | 670mm  | 930mm  |
| Height (H) | 1110mm | 1125mm |
| Net Weight | 520kg  | 690kg  |

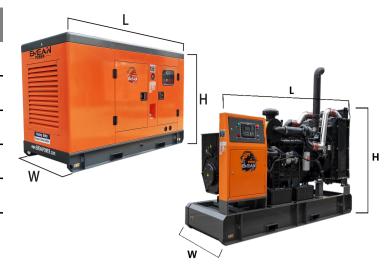

#### **Standard Features:**

- 1.power by Brand new water cooled diesel engine
- 2.Brushless alternators (Class H, with AVR)
- 3.Working condition:  $0^{\circ}C \sim +40^{\circ}C$  (Antifreeze system needed if below  $0^{\circ}C$ )
- 4. Base frame fuel tank for continue 8-10hrs running
- 5. Digital control panel with auto protection
- 6.MCCB air circuit breaker for over current shutdown
- 7.Industrial silencer for silent type generator sets
- 8. Humanized design, simple operation, easy maintenance
- 9. Ventilation parts are designed with modular principles 10. Soundproof canopy which lined with sound reducing foam
- 11.All metal canopy parts are painted by powder foam
- 12.Glass Panel window
- 13.Lockable doors on front and back side for easy maintenance
- 14. Easy maintenance and operation
- 15.Easy lifting and moving, there is forklift hooks and crane holes on chassis
- 16.External emergency stop button
- 17. Steel chassis and anti-vibration pads
- 18.Includes diesel level sensor information to the controller

#### Warranty

We shall provide a warranty of 12 months or 1200 hours from B/L date (whichever comes first), covering all manufacturing defects. We replace damaged parts caused by manufacturing faults or defected parts/materials, but exclude the damageable parts due to customer's incorrect man-made operation. After expiration, we still provides technical and spare parts support with cost for maintenance.





#### YANGDONG YD480D/16KW

Please download the detailed engine data sheet



#### Alternator VG-164C/13KW

Please download the detailed alternator data sheet



#### **Digital control panel**

Please download the detailed controller manual



#### **AUTOMATIC SHUTDOWN AND FAULT CONDITIONS**

- Under/over speed; fail to start
- •High engine temperature; fail to stop
- ·Low oil pressure; charge fail
- Under/over generator volts; over current
- •Under/over generator frequency; emergency stop
- Under/over mains frequency
- Under/over mains voltage
- Low/high battery volts

#### **CHNIT MCCB breaker 3P**



### Sealed 12/24V Dry battery



**ATS** 



**Remote Control** 



Charger



**Jacket Heater** 



**Oil Heater** 



**Extra Fuel Tank** 



**Parallel Cabinet** 



**Trailer** 



# **Contact Information**

Email: sale5@fjepos.com

Phone: +86 19890349907

**WHATSAPP** 



**WECHAT** 



**VIBER** 

